



4
WULF 4


Otto Wulf GmbH & Co. KG
Helgoländer Kai 10
27472 Cuxhaven
Tel.: +49 (0)4721 - 71 66 0
Fax: +49 (0)4721 - 71 66 33

Branch Office Rostock
Alter Hafen Nord 210
18069 Rostock
Tel.: +49 (0)381 - 660 964 94

info@wulf-tow.de
www.wulf-tow.de



Volle Kraft voraus zum Erfolg
Moving ahead to success

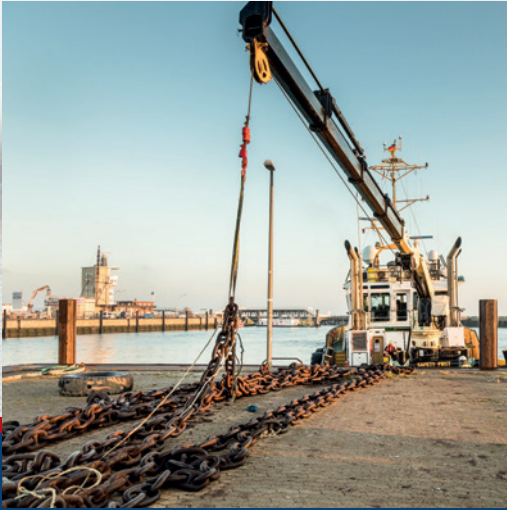

FACTS > WULF 4

4



Type:	DAMEN Shoalbuster 2609
Call sign:	DFIA
IMO No.:	9639737
Mobile:	+ 49 (0)171 - 211 74 15
Sat Tel.:	+ 870 - 773 189 827
E-mail:	wulf4@tug.wulf-tow.de
Flag:	German
Class:	BUREAU VERITAS, I + HULL • MACH; Tug; Unrestricted navigation; • AUT-UMS
Length:	26.02 m
Breadth:	9.10 m
Draught:	max. 2.63 m
Tonnage:	212 GRT
Main engines:	2 CATERPILLAR 3508 TA/C 1,640 bKW (2,230 bHp) at 1,600 rpm
Auxiliaries:	2 John Deere 4045TFM76 230/400 V, 62 kVA, 50 Hz
Propulsion:	2 fixed pitch propellers, 1,800 mm; bow thruster
Bunker:	121.7 m ³ diesel
Bollard pull:	30 t
Equipment:	2 radars, gyro compass, autopilot, GPS, chart platter, 2 echo sounder, speed log, 2 VHF, SSB MF/HF, navtax, AIS, moonpool: equipped with winch for lowering and lifting transducers, 1 deck crane EFFER 125000-4S 14.35 t @ 7.32 m, 5.3 t @ 18.03 m, equipped with runner winch, SWL 5 t (with 70 meters of wire)
Accommodation:	5 crew + 2 reserve
Towing gear:	stern roller SWL 50 t, anchor handling/towing winch: 2 drums (40 t pull, 50 t hold): - 1 with steel wire with 600 m length and 36 mm dia. - 1 with steel wire with 400 m length and 36 mm dia. tugger winch: hydraulic SWL 8 t, towing pins: WK hydraulics 3 pins with wire/rope locking option, SWL 70 t