

4 WULF 4

Otto Wulf GmbH & Co. KG
Helgoländer Kai 10
27472 Cuxhaven
Tel.: +49 (0)4721 - 71 66 0
Fax: +49 (0)4721 - 71 66 33

Branch Office Rostock
Alter Hafen Nord 210
18069 Rostock
Tel.: +49 (0)381 - 660 964 94


info@wulf-tow.de
www.wulf-tow.de



Volle Kraft voraus zum Erfolg
Moving ahead to success



FACTS > WULF 4

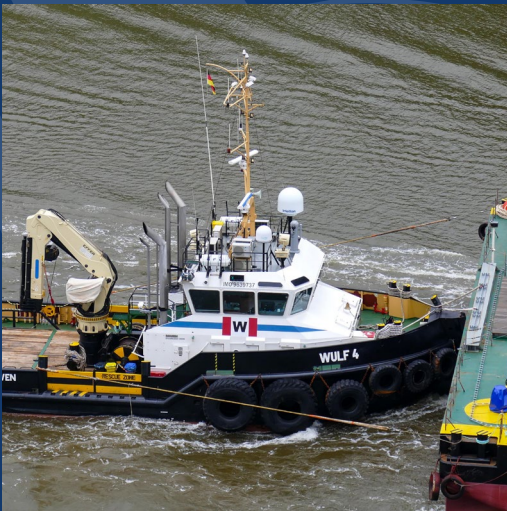

Type: DAMEN Shoalbuster 2609
Call sign: DFIA
IMO No.: 9639737
Mobile: + 49 (0) 171 – 211 74 15
Sat. Tel.: + 870 – 773 204 083
E-Mail: master@wulf4.myc.c.email
Flag: German
Class: BUREAU VERITAS, I + HULL
 • MACH; Tug; Unrestricted navigation; • AUT-UMS

Length: 26.02 m
Breadth: 9.10 m
Draught: max. 2.63 m
Tonnage: 212 GRT

Main engines: 2 CATERPILLAR 3508 TA/C
 1,640 bKW (2,230 bHp) at 1,600 rpm

Auxiliaries: 2 John Deere 4045TFM76
 230/400 V, 62 kVA, 50 Hz

Propulsion: 2 fixed pitch propellers, 1,800 mm; bow thruster
Bunker: 121.7 m³ diesel
Bollard pull: 30 t

Equipment: 2 radars, gyro compass, autopilot, GPS, chart platter, 2 echo sounder, speed log, 2 VHF, SSB MF/HF, navtex, AIS, moonpool: equipped with winch for lowering and lifting transducers, 1 deck crane EFFER 125000-4S 14.35 t @ 7.32 m, 5.3 t @ 18.03 m, equipped with runner winch, SWL 5 t (with 70 meters of wire)

Accommodation: 5 crew + 2 reserve

Towing gear: stern roller SWL 50 t, anchor handling/towing winch: 2 drums (40 t pull, 50 t hold):
 – 1 with steel wire with 600 m length and 36 mm dia.
 – 1 with steel wire with 400 m length and 36 mm dia.
 tugger winch: hydraulic SWL 8 t,
 towing pins: WK hydraulics 3 pins with wire/rope locking option, SWL 70 t